


Flat 700x400mm Chrome ASSEMBLY INSTRUCTIONS

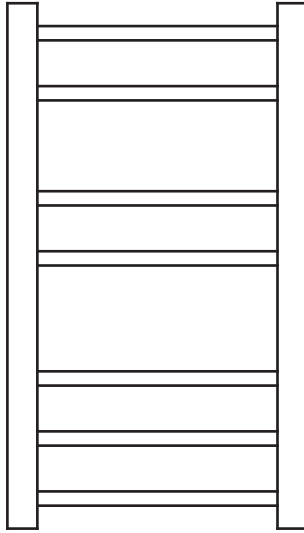

BEFORE YOU START, HERE IS SOME IMPORTANT INFORMATION

IMPORTANT TO RETAIN FOR FUTURE REFERENCE

1. Review instructions carefully before installation
2. Installation should be completed by a suitably qualified person
3. Please dispose of packaging in a responsible manner
4. Compatible for use on all UK heating systems tank fed, combi-systems
5. Suitable for use with heated elements
6. This product can be used at PN \leq 1MPa (10g/cm², 10Bar), It should only be filled with water, and at a temperature below 100°C (212°F). If the temperature exceeds 48°C (or 120°F), please install a warning sign near the product to avoid burning and scolding accidents.
7. See table below for installation requirements.

Fill ³ / ₄ Full	Pressure	Temperature	Comments
water only	PN \leq 1Mpa	0° C < t \leq 100°C	If ambient temperature drops below 1°C, drain out the water to prevent freezing.

Assembly Instruction & Installation

TOOLS REQUIRED

	PTFE Tape
	Large Flat Screwdriver
	8mm Masonry Bit or 3mm Wood Bit
	Socket Set
	Spanner
	Clean Cloth
	Tape measure
	Spirit Level

CONTENTS LIST

PART CODE	PART IMAGE	PART QUANTITY
WASHER		4
AIR VENT PLUG		1
WALL SUPPORT		4
SPACER A		4
SPACER B		4
MASONRY WALL PLUG		4
LONG SCREW		4
BRACKET BUSH A		4
WASHER BUSH B		4
CROSS BOLT M5X20		4
CROSS BOLT M5X30		4