

1901 SHWR PK

1901 Shower Range Complete 1901 Shower Pack



Features:

- Chrome plated to BS EN 248
- Suitable for cavities between 45-75mm
- Minimum cold water supply temperature is 5°C
- Maximum hot water supply temperature is 80°C
- Fully servicable from the front

Product Certifications:

WRAS Certificate No: 1409055
WRAS Expiry Date: 30/09/2019




Also available from the 1901 Shower Range is:



Specification

Style:	Contemporary
Finish/Colour:	Chrome
Main Construction Material:	Brass
No of Controls:	2
Shower Type:	Dual Control
Shower Head Type:	Single Function
Valve/Cartridge Type:	Recessed
Maximum Hot Water Supply Temperature °C:	80
Dynamic Pressure Range: (bar)	Min. 0.2, Max. 5.0
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All - Ideally balanced
Flow Type:	N/A
Flow Rate (l/min @ 3 bar)	36.3
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
Isolation Valve Included:	No
Check Valve Included:	Yes

Dimensions (measurements in mm)

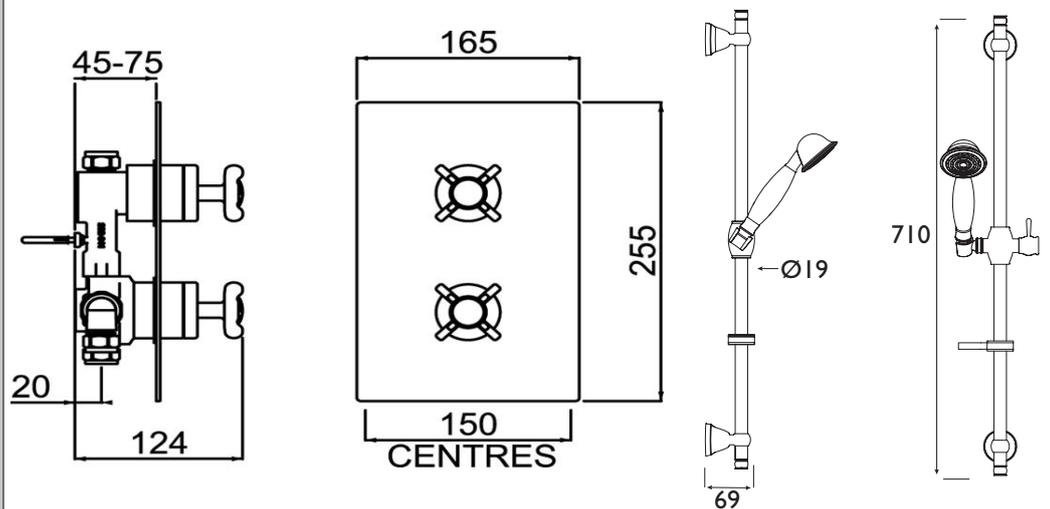

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Outlet 1	9.3	14.8	21	29.7	36.3	46.9

TECHNICAL DATA SHEET

BRISTAN

TAPS & SHOWERS

D2