



### Features:

- Supplied pre-plumbed and ready for connection to a pre-blended supply
- Water economy push button operation with 25 second constant flow (+5/-10 secs)
- Vandal resistant showerhead with adjustable spray trajectory and a choice of spray rings
- 15mm inlet connection
- Max. inlet pressure 3.0 bar

### Product Certifications:




For more products, visit our website:  
<http://www.bristan.com>



### Specification

Style:	Utility
Main Construction Material:	Brass
No of Controls:	1
Shower Type:	Timed Flow (25 Seconds)
Shower Head Type:	Fixed Anti-Vandal
Valve/Cartridge Type:	Manual
Maximum Hot Water Supply Temperature °C:	65 (pre-blended)
Dynamic Pressure Range:	3
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	All Systems
Working Pressure Range:	Min. 0.1 Bar, Max. 5.0 Bar
Connection Inlet:	15mm
Connection Outlet:	Open
Check Valve Included:	No

### Dimensions (measurements in mm)

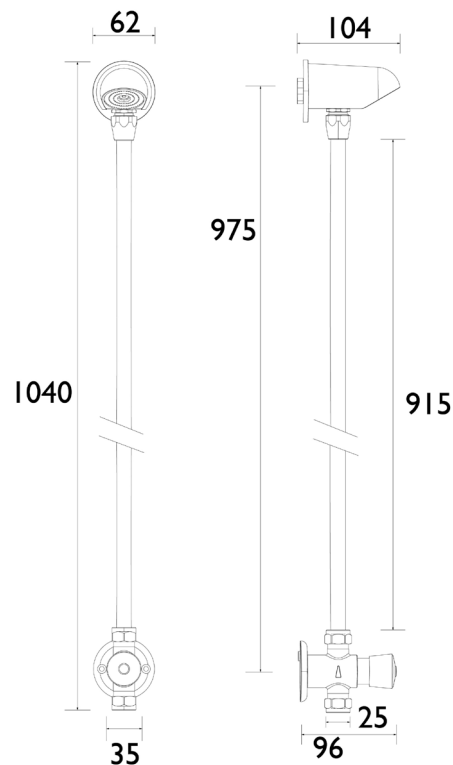

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Through Handset (mixed)	6	9	13	18	22	30

## TECHNICAL DATA SHEET



# BRISTAN

TAPS & SHOWERS

D3