TECHNICAL DATA SHEET



ORTA Bath Filler

Construction:

Product Specification

Product Code: OR BF C
Finish: Chrome
Product Type: Contemporary

Body is of brass construction and

is designed to conform to BS EN 200

Valve Type: ¼ turn ¾" ceramic disc valves
Supply: Suitable for all plumbing systems

Inlet Connections: %" BSP threaded tail
Outlet Connections: M24 Flow Straightener
Working Pressures: Min 0.2bar, Max 10.0bar
Dimensions for Fitting: 180mm inlet centres




Additional Information

- Supplied with metal handles
- Supplied with metal back nuts
- •Chrome plated to BS EN 248

Compliance/Approvals

WRAS Approval No: 1609014

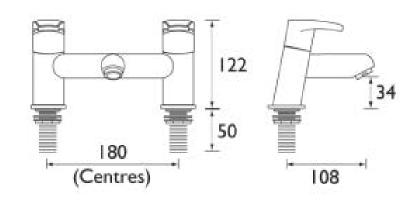

Flow Rates (litres per minute)

System Pressure	0.2bar	0.5bar	1bar	2bar	3bar	5bar
Open Outlet	23.7	37.5	53	74.95	91.8	118.51

Technical Advice: For further information please call 0844 7016273

or email <u>customercare@bristan.com</u>

Guarantee: 5 years covering manufacturing faults.

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 1SG Telephone: 0844 701 6274 Facsimile: 0844 701 6275 Web Site: <u>www.bristan.com</u> Email: <u>enquire@bristan.com</u>







